

PN: A3145000



• Fall Protection • Competent Training • Netting • PPE


Phone: (504) 733-1808  
Fax: (504) 733-2996  
PalmerSafetyUS.com

## TECHNICAL SPECIFICATIONS

### Anchor Sliding Beamer

A removable and reusable sliding I-beam anchor, easy to place and remove. This anchor is designed to easily glide along the beam while trailing the worker. Available adjustable from 3"-12" with a minimum flange thickness of .25".

#### ACCEPTABLE INSTALLATION ORIENTATIONS

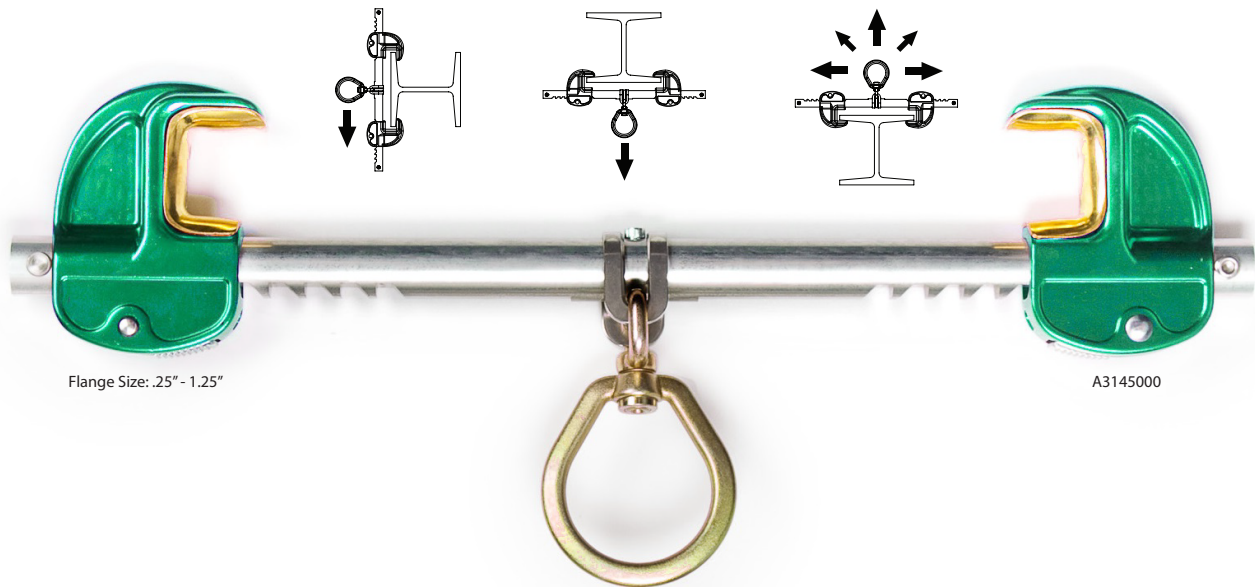

(Adjustable Width: 3"-12")

**CAPACITY:** 1 user: 130 – 310 lbs.

#### DESIGN:

- Anchor capable of being installed on flange of beams. Adjustment of the jaw to variable positions enables it to be installed to varying flange widths.
- Application: I & H Beams
- Color: Green
- Adjustable Width: 3"-12"

#### MATERIAL:

Paw and Support Bar: Aluminum; Swivel: Zinc Plated Steel  
Swivel Mount: Stainless Steel; Paw Inserts: Bronze

**SYSTEM STRENGTH:** Greater than 23 kN (5000 lbs.)

**CONFORM TO NORM:** Meets or Exceeds ANSI Z359.1-2007, Z359.7-2011 / OSHA 1926.502 CE 0321 / EN 795:1996 (+A1:2000) Class B

**WEIGHT:** 3.52 lbs. ± 0.02 lbs. (1596g)