


TECHNICAL SPECIFICATIONS

Lanyard 6 ft. Shock Absorber, Rebar Hook, Single Leg.

6 ft. Single leg lanyard, 2-1/4" rebar hook. Yellow webbing, Meets or exceeds ANSI Z359.13-2013.

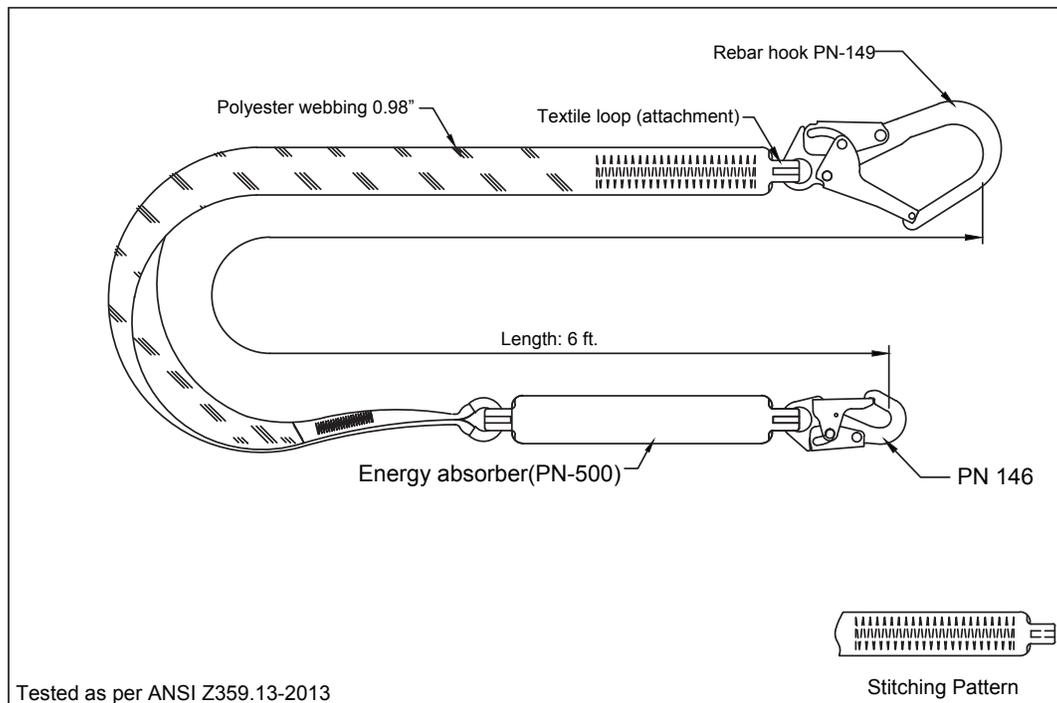

- DESIGN:**
- Single leg lanyard incorporated with shock absorber.
 - One end of the lanyard equipped with steel snap hook (PN-146) and the other end of the lanyard equipped with Rebar hook (PN-149).

WEBBING: Material: Polyester
 Width: 0.98 in. ± 0.04 in.
 Breaking Strength: 6000 lbs. (Min)

STITCHING THREAD: Material: High-tenacity polyester

METAL COMPONENT: Material: Alloy Steel
 Finish: Silver or Golden Yellow Galvanized
 Breaking Strength: 5000 lbs.

VITAL TEST COMPLIANCE: Static Strength: 5000 lbs. for 1 minute
 Dynamic Strength: Maximum breaking force does not exceed 8 kN in the line when tested on a free fall from 6 ft. height attached to a test mass of 282 lbs.

WEIGHT: 3.44 lbs. ± 0.02 lbs.