


## TECHNICAL SPECIFICATIONS

### SRL LE 9' Galvanized Cable with Small Hook

SRD 9' Leading Edge Single Galvanized Cable with Small hook, 9' retractable galvanized cable, swivel top composite housing, 3/4" load indicator hook, 1/2" carabiner included. Black housing. Meets or exceeds ANSI/ASSE Z359.14-2014 Class B SRL-LE.

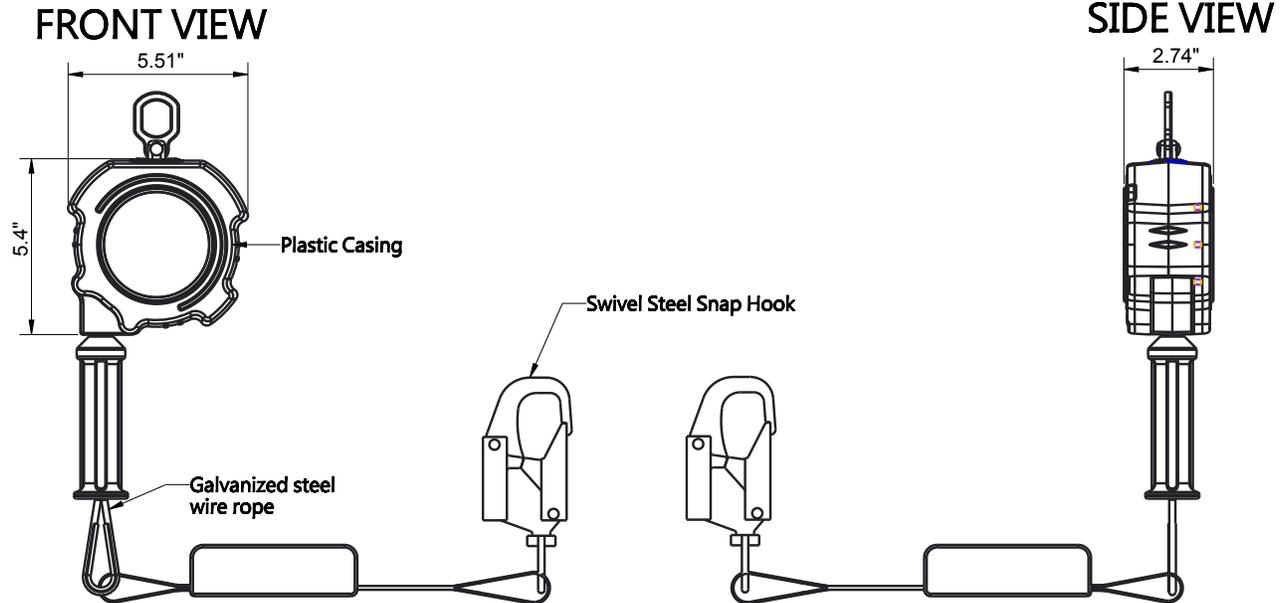

Meets or Exceeds ANSI Z359.14-2014 ClassB SRL-LE

- PHYSICAL PARAMETERS:**
- Composite housing.
  - Extremely compact, durable and lightweight plastic casing.
  - Has swivel anchorage eye at anchorage end. Swivel steel snap hook with load indicator at attachment end (gate strength 3600 lbs.).
  - Galvanized steel wire rope 7/32".

**LENGTH:** 9 ft.

**CABLE:** Material: Galvanized steel wire rope diameter of 7/32"

**MINIMUM BREAKING STRENGTH:** 3300 lbs.

**NORM:** Meets or exceeds ANSI/ASSE Z359.14-2014 Class B SRL-LE.

**VITAL TEST COMPLIANCE:** Static Strength: 3000 lbs. for 1 minute. Dynamic Strength: 300 lbs. mass subjected to a 4' free fall. SRL lock and remain lock until released. Dynamic Performance: 282 lbs. mass subjected to a zero free fall with extension of 36" lifeline. Braking force less than 1800 lbs. Average braking force less than 900 lbs. and arrest distance less than 54".

**WEIGHT:** 5.11 lbs. ± 0.02 lbs.

