


## TECHNICAL SPECIFICATIONS

### SRL LE 9' Galvanized Cable with Aluminum Rebar Hook

SRD 9' Leading Edge Single Galvanized Cable with Aluminum Rebar hook, 9' retractable galvanized cable, swivel top composite housing, 2-1/2" aluminum rebar hook, 1/2" carabiner included. Black housing. Meets or exceeds ANSI/ASSE Z359.14-2014 Class B SRL-LE.

FRONT VIEW SRL1411242

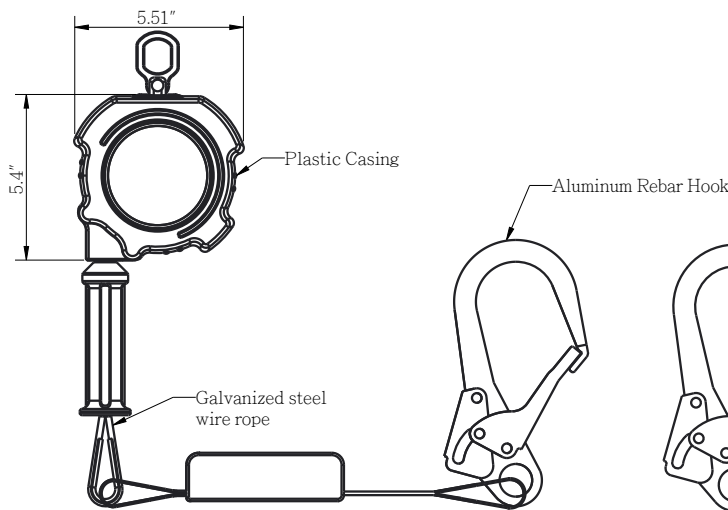

SIDE VIEW



Meets or Exceeds ANSI Z359.14-2014 Class B SRL-LE

**PHYSICAL PARAMETERS:**

- Composite housing.
- Extremely compact, durable and lightweight plastic casing.
- Stainless Steel and corrosion-resistant components.
- Quick activating speed sensing brake systems.
- Galvanized steel wire rope 7/32".
- For sharp edge application.

**LENGTH:** 9 ft.

**CABLE:** Material: Galvanized steel wire rope diameter of 7/32"

**MINIMUM BREAKING STRENGTH:** 3300 lbs.

**NORM:** Meets or exceeds ANSI/ASSE Z359.14-2014 Class B SRL-LE.

**VITAL TEST COMPLIANCE:**

Static Strength: 3000 lbs. for 1 minute. Dynamic Strength: 300 lbs. mass subjected to a 4' free fall. SRL lock and remain lock until released.  
 Dynamic Performance: 282 lbs. mass subjected to a zero free fall with extension of 36" lifeline. Braking force less than 1800 lbs. Average braking force less than 900 lbs. and arrest distance less than 54".

**WEIGHT:** 5.42 lbs. ± 0.02 lbs.

