PN: SRL411212




Phone: (504) 733-1808 Fax: (504) 733-2996 PalmerSafetyUS.com

12

TECHNICALSPECIFICATIONS

SRD 12' Leading Edge Galvanized Cable with Small Hook

12' leading edge single retractable galvanized cable, swivel top composite housing, 3/4" load indicator hook, 1/2" carabiner included. Black housing. Meets or exceeds ANSI/ASSE Z359.14-2021 Class 2.

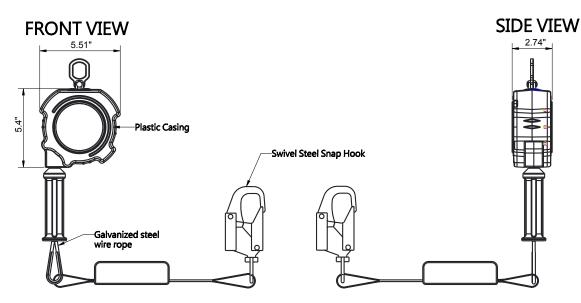

Meets or exceeds ANSI Z359.14-2021 Class 2

PHYSICAL PARAMETERS:	 Composite housing. Extremely compact, durable and lightweight plastic casing. Stainless Steel and corrosion-resistant components. Quick activating speed sensing brake systems. Galvanized steel wire rope 7/32". For sharp edge application.
LENGTH:	12 ft.
SIZE:	L x W x H: 28.35"x5.51"x 2.36"
CABLE:	Material: Galvanized steel wire rope diameter of 7/32"
USER CAPACITY:	130-310 lbs.
NORM:	Meets or exceeds ANSI/ASSE Z359.14-2021 Class 2
WEIGHT:	5.11 lbs. ± 0.02 lbs.