

PN: SRL411242



• Fall Protection • Competent Training • Netting • PPE

Phone: (504) 733-1808  
Fax: (504) 733-2996  
PalmerSafetyUS.com


## TECHNICAL SPECIFICATIONS

### SRD 12' Leading Edge Galvanized Cable with 2-1/4" Aluminum Rebar Hook

12' leading edge single retractable galvanized cable, swivel top composite housing, 2-1/4" aluminum rebar hook, 1/2" carabiner included. Black housing. Meets or exceeds ANSI/ASSE Z359.14-2021 Class 2.

FRONT VIEW SRL411242

SIDE VIEW

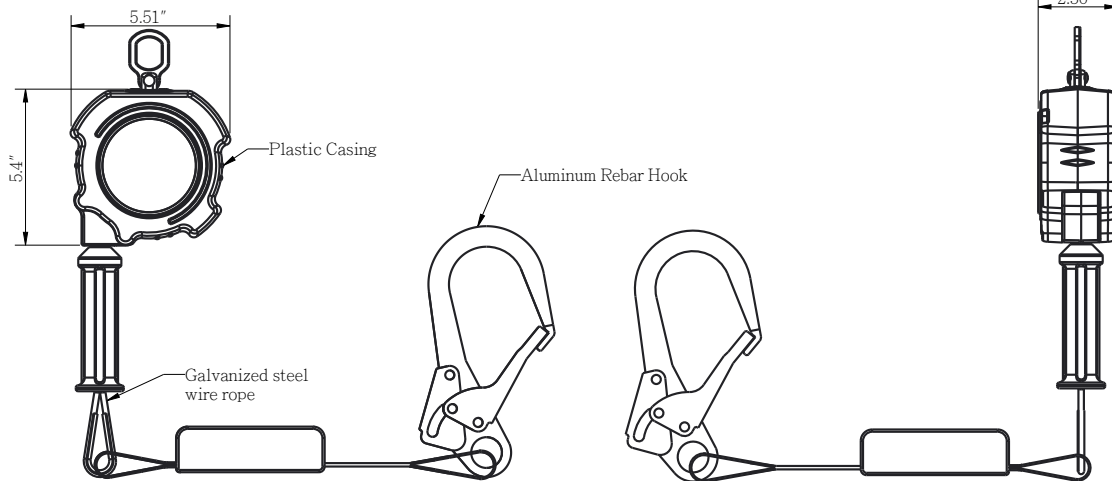

Meets or exceeds ANSI Z359.14-2021 Class 2

**PHYSICAL PARAMETERS:**

- Composite housing.
- Extremely compact, durable and lightweight plastic casing.
- Stainless Steel and corrosion-resistant components.
- Quick activating speed sensing brake systems.
- Galvanized steel wire rope 7/32".
- For sharp edge application.

**LENGTH:** 12 ft.

**SIZE:** L x W x H: 30.71"x5.51"x 2.36"

**CABLE:** Material: Galvanized steel wire rope diameter of 7/32"

**USER CAPACITY:** 130-310 lbs.

**NORM:** Meets or exceeds ANSI/ASSE Z359.14-2021 Class 2

**WEIGHT:** 5.42 lbs. ± 0.02 lbs.