

PN: SRL411321




• Fall Protection • Competent Training • Netting • PPE

Phone: (504) 733-1808
Fax: (504) 733-2996
PalmerSafetyUS.com

TECHNICAL SPECIFICATIONS

SRL 11' Galvanized Cable with Swivel Indicator Steel Rebar Hook

11 ft. retractable galvanized cable, swivel top plastic housing, built-in shock absorber, 2-1/4" load indicator hook, 1/2" carabiner, blue housing, minimum breaking strength 4500 lbs., rated for 420 lbs. Meets or exceeds ANSI Z359.14-2012 Class B.

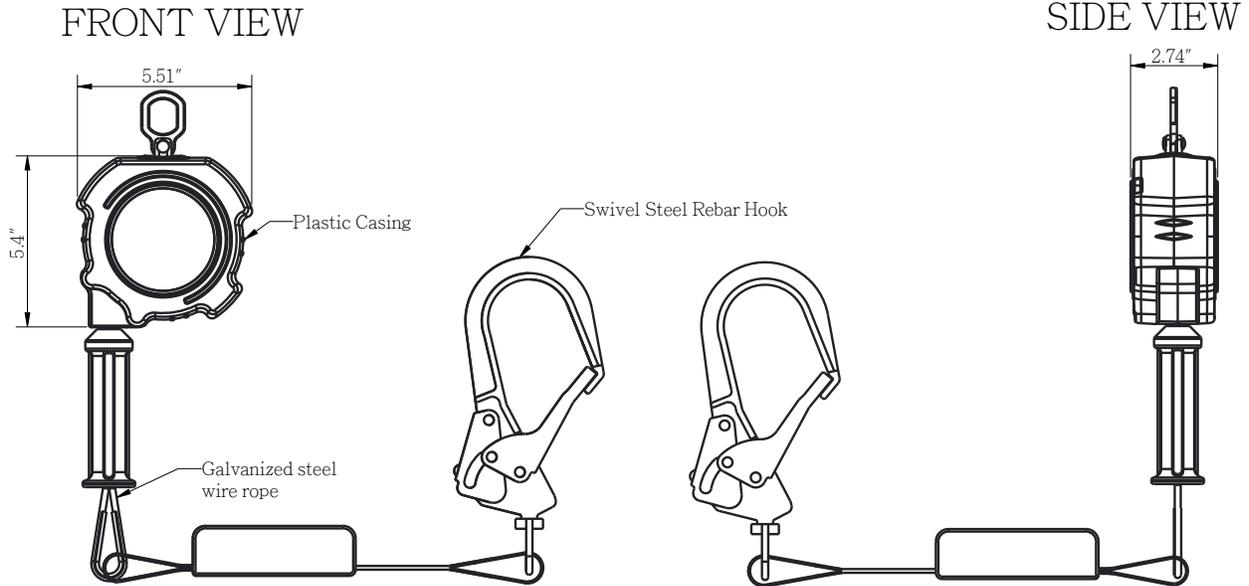

Meets or Exceeds ANSI Z359.14-2014 Class B

PHYSICAL PARAMETERS:

- Composite housing.
- Extremely compact, durable and lightweight plastic casing.
- Quick activating speed sensing brake systems.
- Galvanized steel wire rope 3/16".

LENGTH: 11 ft.

CABLE: Material: Galvanized steel wire rope diameter of 3/16"

MINIMUM BREAKING STRENGTH: 4500 lbs.

NORM: Meets or exceeds ANSI/ASSE Z359.14-2014 Class B

WEIGHT: 6.13 lbs. ± 0.02 lbs.

